


Data sheet

SKYSAFE PRO FLEX Y

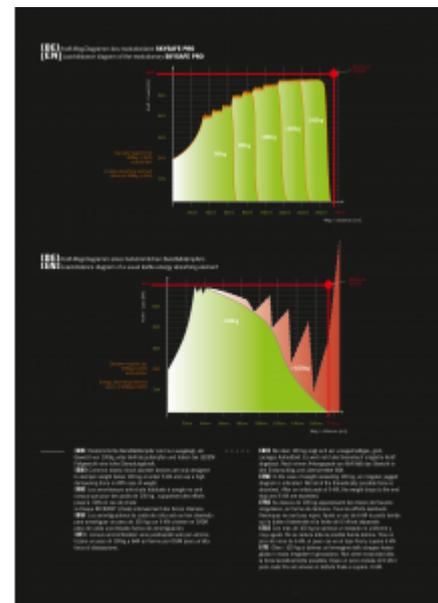

GENERAL

Art. no.:	L-0558-1,8	E-class number:	40-02-01-04
EAN:	4030281180647	Customs no.:	56090000
Standard:	EN 354:2010 EN 355:2002 EN 795:2012 RFU PPE-R/11.063 V1:2018 RFU PPE-R/11.074 V1:2018		

Data sheet

SKYSAFE PRO FLEX Y

ONE4ALL - The SKYSAFE PRO

Revolutionary, new, patented energy absorber with the large weight range from 50 - 140kg (110 - 310 lbs.) that always withstands a maximum impact of less than 6 kN at a maximum absorber length of 1.75m (5.7 Feet).

The final impact resistance of 22 kN, also in the absorber, before AND after a fall is exceptional as well. SKYSAFE PRO furthermore meets the most relevant international standards in one SINGLE product.

UNIQUE: The built-in, adjustable RESCUE LOOPS! As a result, rescuers need not set up a rescue system and hereby save precious time in a rescue!

Available in four versions with different carabiner combinations:
I-web, Y-web, I-web tie-back, Y-web tie-back.

GENERAL

Internat. standard:
ANSI Z359.13-6/12FTFF:2013, AS/NZS
1891.1:2007, MEETS CSA Z259.11-05-E6:2010

FEATURES

Fall indicator	
Breaking load, major axis: 22,00 kN	
Hand-washing:	40 °C
Suitable for edges:	yes
Max. service life:	10 Years
Max. number of persons:	1
Rated load:	140 KG
Patent	
Rescue Loop:	yes
Temperature:	from 45 °C to -35 °C
Suspension element:	BAND
Area of application: Wind Energy / Offshore Industry	

DIMENSIONS

Size:	1,8m
Weight:	2,31 kg

HARDWARE

Carabiner on anchoring point side:	FS 64 ALU
Carabiner on belt side:	KOBRA AL TRI

MATERIAL

Material:	Polyester, Aluminium
Webbing material:	Polyester