

3M™ Protecta® Comfort Belt Style Fall Arrest Harness with Horizontal Leg Straps

Part number(s):

1161758 Small (S)

1161759 Medium/Large (M/L)

1161760 X-Large (XL)

Description

Sub-brand:	Protecta®
Industry:	Telecommunications
Applications:	Pole climbing and general work at height

Features

Rear fall arrest attachment point:	<ul style="list-style-type: none"> Large D-ring Steel - zinc plated black coating
Front fall arrest attachment point:	<ul style="list-style-type: none"> Standard D-ring Steel - zinc plated black coating
Work positioning attachment points:	<ul style="list-style-type: none"> Large bent D-ring Steel - zinc plated black electro-deposition paint
Buckles:	<ul style="list-style-type: none"> Quick connect buckles Steel - zinc plated, black coated
Adjustment:	<ul style="list-style-type: none"> Torso, legs, waist Torso: Spring adjuster Steel - zinc plated black electro-deposition paint
Webbing:	45 mm polyester - water & dirt resistant
Thread:	Polyester
Additional features:	<ul style="list-style-type: none"> Front and rear fall indicators Hip & leg padding 2x Auto-resetting lanyard keepers Hook and loop web ends Protected labels Articulated rings Rotating belt Gear tool loops and tool attachment points
Weight capacity:	140 kg
Operating temperature:	-35°C +57°C
Standards:	CE EN361:2002; EN358:1999




Front



Back

3M Protecta® Fall Arrest Harness sizing chart

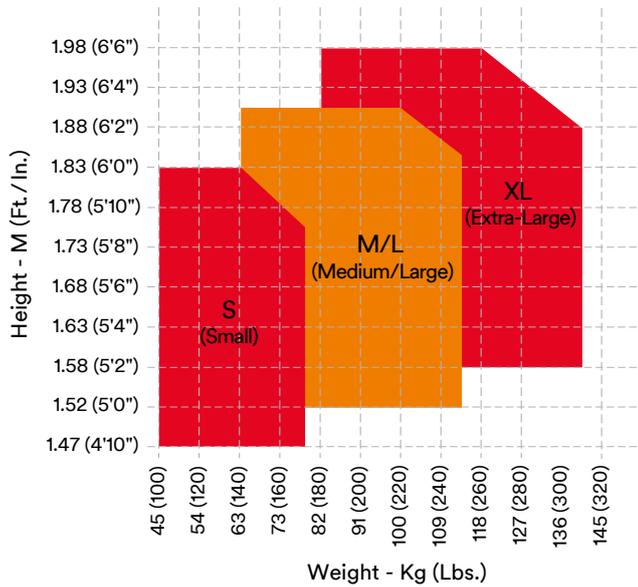

Weight

	←.....→	kg
1161758	Small (S)	2.41
1161759	Medium / Large (M/L)	2.46
1161760	X-Large (XL)	2.52

Optional Shoulder & Back Padding Accessory

- Removable, comfortable, lightweight and breathable



	←.....→	kg
1150491	Universal	0.15

Important Notice

The mounting and use of the product described within this document assumes that the user has previous experience of this type of product and that it will be assembled by a competent professional according to product documentation. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.

Compliance to the information and specification relative to the product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. The 3M Group (who cannot verify or control these elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control.

Warranty conditions for products are determined with the sales contract documents and with the mandatory and applicable law, excluding any other warranty or compensation.



Registered Offices:

Capital Safety (Northern Europe) Limited
3M Centre, Cain Road
Bracknell, Berkshire, RG12 8HT, UK

Capital Safety Group (EMEA)
Le Broc Center, Bâtiment A, Z.1. 1re Avenue
– BP15, 06511 Carros Le Broc, Cedex, FRANCE

Phone: +33 (0)4 83 58 08 08
Email: informationfallprotection@mmm.com
Web: 3M.com/FallProtection